


1

2

3


REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED

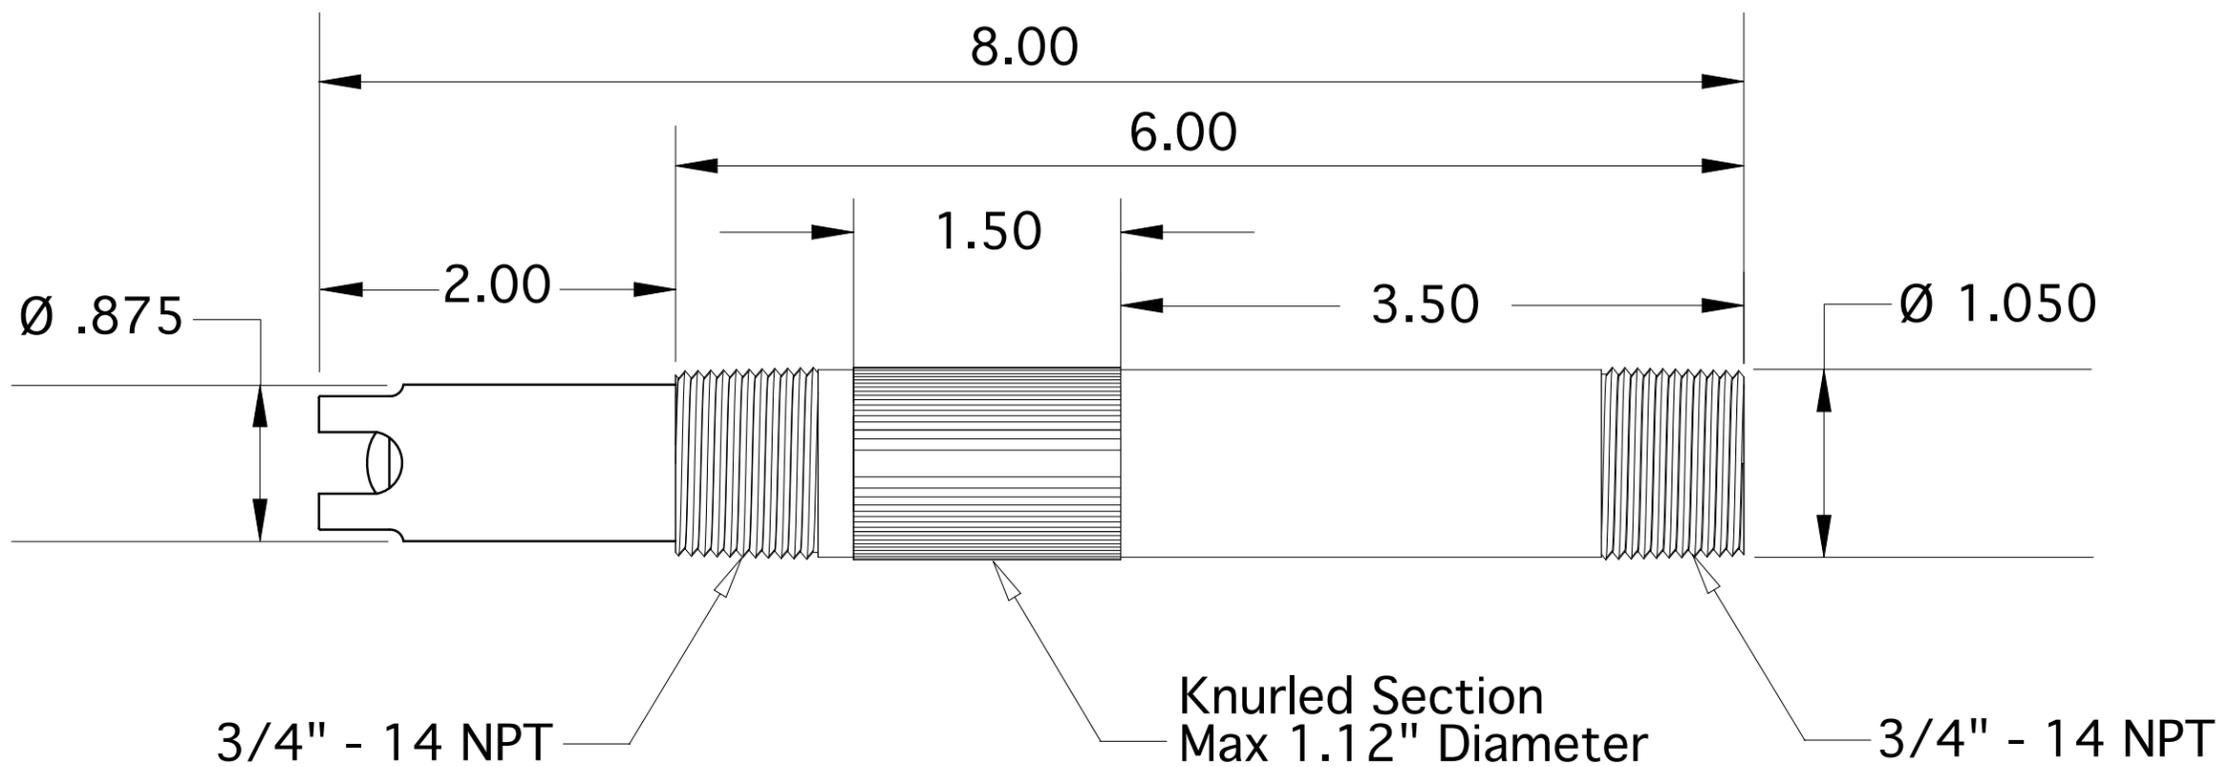

NOTES

1. All dimensions are in inches, unless otherwise indicated with tolerances as detailed below
2. Sensor body material of construction is CPVC (6X13/6X12), RADEL (6X32), PEEK (6X42), RYTON (6X53/6X54)
3. Drawing shown in the standard with protective tines configuration (4 places, 90 degrees apart).  
The 2 protective tines only "GRO" configuration (2 places, 180 degrees apart) is optional.
4. In the alternate without tines configuration ("NG") the sensor body is exactly 7.5 inches in length.  
The max displacement for parabolic pH glass is 0.2" yielding a max insertion depth of 1.7 inches past threads & overall max length of 7.7 inches.
5. Do not use any sensor beyond the factory defined maximum temperature or pressure rating.



TOLERANCES	
1 Place: $\pm .1$	3 Places: $\pm .005$
2 Places: $\pm .01$	4 Places: $\pm .0005$
Angular: $\pm 0.25^\circ$	

DRAWN BY RH
CHECKED BY TADP
APPROVED BY MJP

TITLE 3/4"-3/4" MNPT Inline / Immersion / Submersible			
SIZE <b>B</b>	PROJECT <b>IMMERSION</b>	DRAWING NO. <b>6-6 Low-Profile pH Glass</b>	REV /
SCALE Not to Scale	MODEL 6X32,6X42,6X53,6X54	SHEET 1	OF 1

1

2

3