

1

2


3

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED

A

A

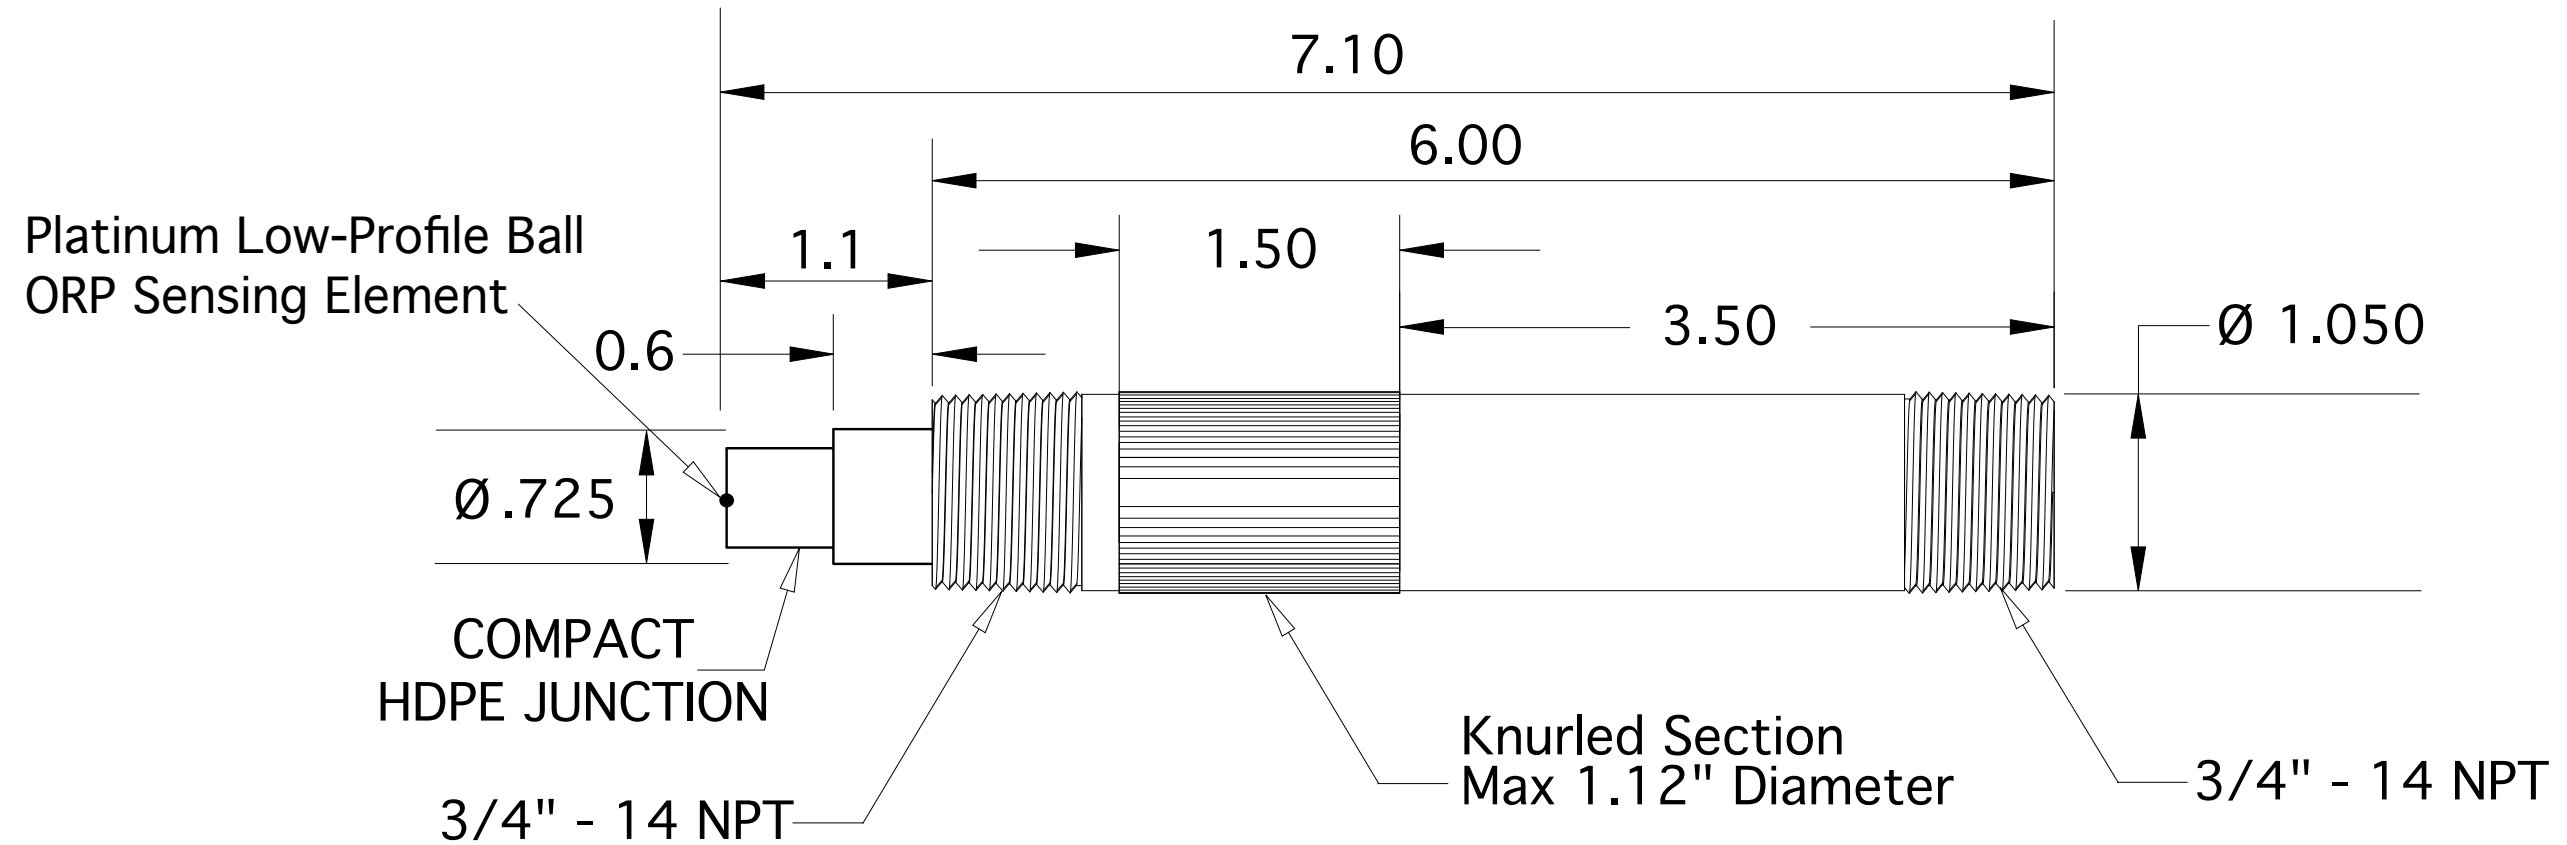

NOTES

1. All dimensions are in inches, unless otherwise indicated with tolerances as detailed below
2. Sensor body material of construction is CPVC standard or RYTON when Alpha Prefix "PPS" is invoked
3. Drawing shown in the standard without protective tines configuration used for inline installations.
4. Protective tines option is not available for 2X12 series pH/ORP sensors. These sensors are intended for inline type installations only. The recommended line size is a standard 3/4" FNPT pipe tee.
5. The rear 3/4" MNPT threads are only intended for sealing the back of cable with 3/4" conduit.
6. Use alternate sensor models available with protective tines option for immersion or submersion use.
7. Do not use any sensor beyond the factory defined maximum temperature or pressure rating.

B

B



TOLERANCES		DRAWN BY
1 Place: ± .1	3 Places: ± .005	RH
2 Places: ± .01	4 Places: ± .0005	CHECKED BY
Angular: ± 0.25°		TADP
		APPROVED BY
		MJP

TITLE			
3/4" MNPT Inline Installation Styles Only			
SIZE	PROJECT	DRAWING NO.	REV
B	INLINE	6-9-Pt Low-Profile ORP	/
SCALE	Not to Scale	MODEL	2X12 ONLY
SHEET 1		OF 1	

1

2

3