



IOTRON™ SENSORS

INTEGRATED INDUSTRIAL pH SENSOR SPECIFICATIONS

<u>Sensor Part Number & Short Description:</u>	6332 – Slurry & Viscous Resistant pH Sensor for Inline, Immersion & Submersible Installations; Front ¾” MNPT for Inline & Rear ¾” MNPT for Immersion / Submersion 6332 is now a special order model with minimum order quantities (MOQ) required Please see models 5331 and/or 6331 as alternates without any MOQ requirement
<u>Configuration Type:</u>	<i>Front threads interface ¾” FNPT of tee or process tank for Inline Use or Rear threads interface ¾” FNPT of insertion tube for immersion or waterproofing seal for submersion</i>
<u>General Sensor Specifications:</u>	
Operating Temperature Range:	-5 to 105°C (-35 to 150°C with Extreme Dehydration Resistant “E” Option – PVDF Only)
Operating Pressure Range:	1 to 100 psig (6.9 to 690 kPa) with ¾” MNPT Front Threads for Inline Installations
Sensor Body Material:	RADEL® R-5000 NT (Poly-Phenyl-Sulfone, PPSU)
Junction Support Matrix Material:	KYNAR® (Poly-Vinylidene-Fluoride, PVDF) Standard or Polypropylene (PP) - 6332PP
External Dimensions:	See Drawing 6-6
<u>pH Measurement Specifications:</u>	
Measurement pH Range:	0 to 14 pH (-0.5 to +14.5 with Wide Range Option Invoked, Alpha Prefix “V”)
Measuring Glass Type:	Low-Profile Parabolic Thick-Wall Break-Resistant, Green Glass (MUGG)
pH Glass Dimensions:	0.315” (8.0 mm) DIA
Initial Impedance:	< 1,500 MΩ @ 25 °C
Sodium Ion Error:	Less than 0.15 pH in sodium (Na ⁺) solutions at pH 14.00
Acidic Error:	Less than 0.05 pH in hydrochloric acid (HCl) solutions at 0.00 pH
<u>Reference System Specifications:</u>	
Type:	Double Junction Standard (Triple Junction Optional, Alpha Prefix “TJ”)
Reference Half Cell:	Ag/AgCl, Saturated KCl
Primary Junction:	Porous Ceramic, Sat. KCl in crosslinked polymer, Interfaced to Secondary Junction
Secondary Junction:	Solid-State Non-Porous Cross-Linked Polymer embedded in Kynar/Polypropylene Matrix holds excess KCl assuring saturation at all temps for stability & long sensor service life
<u>Supported Order Options with Alpha Prefix Order Code Designation:</u>	Ammonia gas resistant (“A”), Chlorine gas resistant (“C”), Organic Media Resistant (“L”), Solvent Resistant (“TS”), 3-Wire TC (“M”), ACCU-TEMP Fast TC (“X”), Reduce to 2 ea Protective Tines (“GRO”), No Protective Tines (“NG”), Shielded Preamp Cable (“BL”)
<i>Inquire to factory for specials</i>	
<u>Example Recommended Applications:</u>	Abrasive slurry & high-viscosity inline, immersion or submersible process installations. Any measurement where aggressive chemical cleaning is needed to remove fouling or low-maintenance operation is required with minimal cleaning and re-calibration.
<u>Storage and Shelf Life:</u>	One (1) year from date of dispatch from factory when stored at indoor ambient room temperature with proper orientation & protector cap. Extreme Dehydration Resistant Option (Alpha Prefix “E”) sensors are suitable for cold storage down to -35 °C (-31 °F).
<u>Available Configurations & Options:</u>	
Integrated Components:	- Temperature Compensation Element (compatible type must be specified) - Solution Ground Liquid Earth, 316SS (alpha prefix “Y”), or Platinum (alpha prefix “Pt”) - Analog Conventional or Differential Preamplifier (Contact factory for available options) - Smart digital sensor board for use with 3TX-HiQ-pH Intelligent pH & ORP transmitters
Analog Sensors without integral preamplifier:	Terminated with Male BNC connector (-MBNC) or Tinned Lead Wires (-TL)
Analog Sensors with integral preamplifier:	Terminated with Tinned Lead Wires (-TL) or Quick Disconnect NEMA 6P Snap (-Q7M)
Analog Dual pH & ORP All-in-one Sensors <i>without integral preamplifier style only:</i>	Terminated with tinned lead wires (-TL), Alpha Prefix “PtD”, 2 each reference half-cells allow for simultaneous use on two completely separate input channels or transmitters
Digital Smart Sensors:	Terminated with IP67/NEMA 6P rated waterproof & corrosion resistant snap connector. For 3TX-HiQ-pH Intelligent pH/ORP transmitters or HiQDT style with RS-485 MODBUS RTU to interface with any suitable PLC or SCADA (Minimum Quantities may apply)


1

2

3

REVISION HISTORY		
REV	DESCRIPTION	DATE

APPROVED

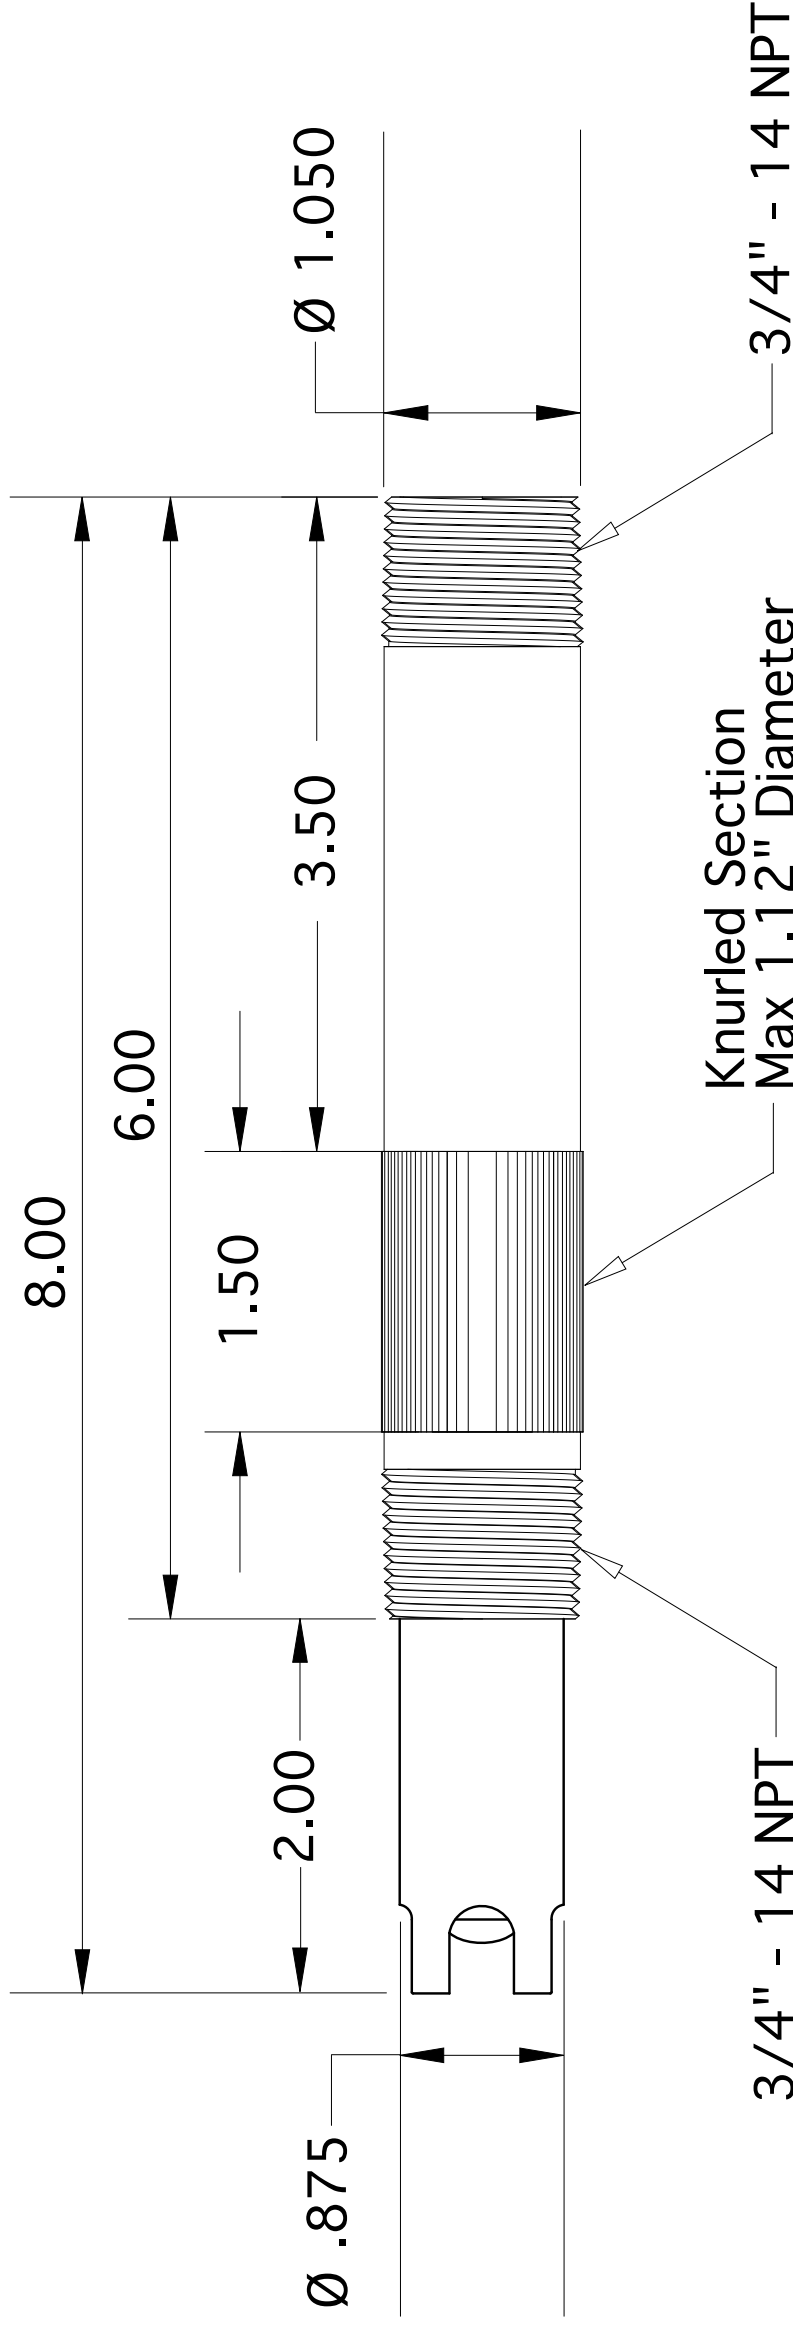

A

A

NOTES

1. All dimensions are in inches, unless otherwise indicated with tolerances as detailed below
2. Sensor body material of construction is CPVC (6X13/6X12), RADEL (6X32), PEEK (6X42), RYTON (6X53/6X54)
3. Drawing shown in the standard with protective tines configuration (4 places, 90 degrees apart).
The 2 protective tines only "GRO" configuration (2 places, 180 degrees apart) is optional.
4. In the alternate without tines configuration ("NG") the sensor body is exactly 7.5 inches in length.
The max displacement for parabolic pH glass is 0.2" yielding a max insertion depth of 1.7 inches past threads & overall max length of 7.7 inches.
5. Do not use any sensor beyond the factory defined maximum temperature or pressure rating.

B

B



Advanced Sensor Technologies U.S.A.
Website: <http://www.astisensor.com>

TITLE		3/4"-3/4" MNPT Inline / Immersion / Submersible	
SIZE	PROJECT	DRAWING NO.	REV
B	IMMERSION	6-6 Low-Profile pH Glass	/
SCALE		MODEL	SHEET
Not to Scale		6X32.6X42.6X53.6X54	1 OF 1

2

1

3